



COMPANY

Linear Series


A NAME YOU CAN TRUST SINCE 1980

VOLUME 13 • EDITION 1



Ultra Bright LED™

Newest Generation of Linear Lighting
Energy Efficient Green Light



White Warm White Red



Blue Pure Green

FEATURES AND BENEFITS

- Dimmable
- Cuttable every 19 1/2" (LEDs per cut 30)
- Wattage: (4.32 per foot)
- Voltage: 120V
- Maximum Single Run: 150 feet
- Size: 1/2" x 1/4"
- Roll Length: 150 feet
- LEDs per foot: 18
- Waterproof: IP67
- LED Lifetime: 50,000 Hours
- Warranty: 5 Years
- LED: 5050 SMD
- Custom Cut Orders Fully Assembled Ready To Go

MODEL #	LIGHT COLOR	COLOR TEMP.	LUMENS (Per Foot)
UBL-150W	White	6000-65000K	272
UBL-150WW	Warm White	3000-3300K	242
UBL-150-B	Blue	480-490	30
UBL-150-R	Red	630-640	30
UBL-150-G	Green	530-540	120

MODEL #	ACCESSORY DESCRIPTIONS
UB-PK	5 Foot Fused Complete Power Kit with LED Driver
UB-MC	Bag of 100 Mounting Clips
UB-AC	39 Inch Aluminum Mounting Channel
UB-12E	12 Inch Extension with Connector Pins
UB-24E	24 Inch Extension with Connector Pins
UB-ILS	Inline Splice Connector
UB-C068	39 Inch Channel with Diffuser Cover
UB-6006C	39 Inch Channel with Diffuser Cover




UB-PK



UB-MC



UB-AC

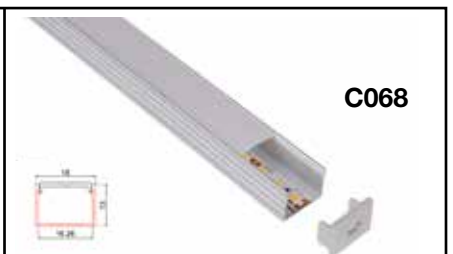

C068



UB-24E



UB-ILS




C006C



LED Neon Flex-A-Lite™

120 Volt

Energy Efficient Green Light



White

Red

Blue



Pure Green

Yellow

FEATURES AND BENEFITS

- Cuttable every 19 1/2 Inches (LEDs per cut 36)
- Wattage: 2.9 per section 19 1/2"
- Voltage: 120V
- Maximum Single Run: 150 feet
- Size: 3/8" x 3/4"
- Roll Length: 150 feet
- LEDs per foot: 22
- Waterproof: IP67
- LED Lifetime: 50,000 Hours
- Warranty: 5 Years
- Custom Cut Orders Fully Assembled Ready To Go

MODEL #	LIGHT COLOR	COLOR TEMP.
NF-150W	White	6000-6500K
NF-150B	Blue	420-430
NF-150R	Red	540-550
NF-150G	Green	480-490
NF-150Y	Yellow	410-420



MODEL #	ACCESSORY DESCRIPTIONS
NF-PK	110V Power Kit with LED Driver End Cap and Heat Shrink
NF-MC	Bag of 25 Aluminum Mounting Clips
NF-AC	39 Inch Aluminum Mounting Channel
NF-12E	12 Inch Extension with Connector Pins
NF-24E	24 Inch Extension with Connector Pins
NF-ILS	Inline Splice Connector
NF-PT	12 Inch Cut Pigtail No Driver with Connector Pins
NF-HS	2 Inch Heat Shrink Strips for Additional Connections

NF-PK	NF-MC	NF-AC	NF-12E
NF-24E	NF-ILS	NF-PT	NF-HS



LED Digital Impact Strip

Can travel at speeds over 100+ miles an hour.
Choose your own travel directions, color, patterns
and functions.

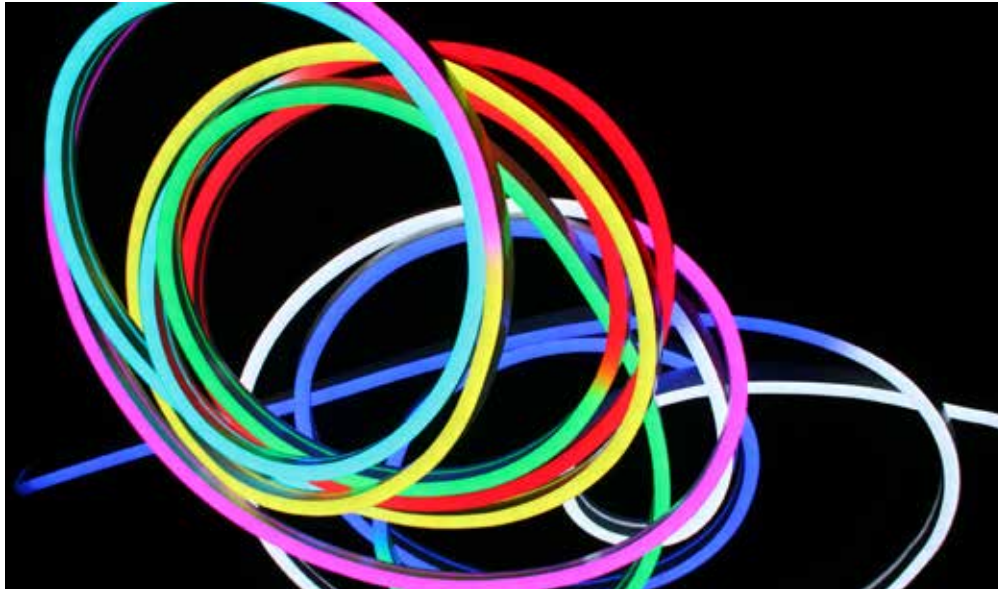

FEATURES AND BENEFITS

- Cuttable every 4 Inches
- Wattage: 3.71 per foot
- Voltage: 24V DC
- Maximum: 30 feet
- Size: H - 5/8" x W - 3/8"
- Aluminum Mounting Clips
- 39" Aluminum Mounting Channel
- Waterproof: IP67
- LED Lifetime: 50,000 Hours
- Warranty: 5 Years
- Custom Cut Orders Fully Assembled Ready To Go

MODEL #	LIGHT COLOR	COLOR TEMP.	PER FOOT
	Red	6000-6500K	622+
LDIS -	Green	420-430	522
24 DC	Blue	540-550	461
	R+G+B (W)	480-490	N/A

DIGITAL IMPACT STRIP


has a maximum run of 30 feet. You can run a total of 150 feet off of 1 controller when adding additional power supplies at the end of each 30 foot run.





LED Digital Impact Strip

24V Energy Efficient Green Light
Solid Color



FEATURES AND BENEFITS

- Cuttable every 2 Inches
- Wattage: 2.50 per foot
- Voltage: 24V DC
- Maximum: 30 feet
- Size: H - 5/8" x W - 5/8"
- Aluminum Mounting Clips
- 39" Aluminum Mounting Channel
- Waterproof: IP67
- LED Lifetime: 50,000 Hours
- Warranty: 5 Years
- Custom Cut Orders Fully Assembled Ready To Go

MODEL #	LIGHT COLOR	COLOR TEMP. PER FOOT	KELVIN
LISW-24 DC	White	122.37	6000+
LISWW-24 DC	Warm White	103.27	3000+
LISR-24 DC	Red	43.18	621+
LISG-24 DC	Green	86.37	520+
LISB-24 DC	Blue	13.17	468+
LISA-24 DC	Amber	41.87	582+


- High Quality and Brightness SMD LED Chip
- Easy Installation
- Environmentally Friendly and Energy Efficient
- UV and Flame Resistant Construction (PVC)
- High Color Consistency and Smooth Illumination with no light dots.





Mini LED Impact Strip

24V Energy Efficient Green Light
Solid Colors




FEATURES AND BENEFITS

- Cuttable every 2 Inches
- Wattage: 1.5 per foot
- Voltage: 24V DC
- Maximum: 30 feet
- Size: H - 1/2" x W - 1/4"
- Aluminum Mounting Clips
- 39" Aluminum Mounting Channel
- Waterproof: IP67
- LED Lifetime: 50,000 Hours
- Warranty: 5 Years
- Custom Cut Orders Fully Assembled Ready To Go

MODEL #	LIGHT COLOR	COLOR TEMP. PER FOOT	KELVIN
LMIW-24 DC	White	43.85	6000+
LMIWW-24 DC	Warm White	43.65	3000+
LMIR-24 DC	Red	15.20	619+
LMIG-24 DC	Green	61.23	520+
LMIB-24 DC	Blue	9.11	471+
LMIA-24 DC	Amber	15.75	586+

- High Quality and Brightness SMD LED Chip
- Easy Installation
- Environmentally Friendly and Energy Efficient
- UV and Flame Resistant Construction (PVC)
- High Color Consistency and Smooth Illumination with no light dots.

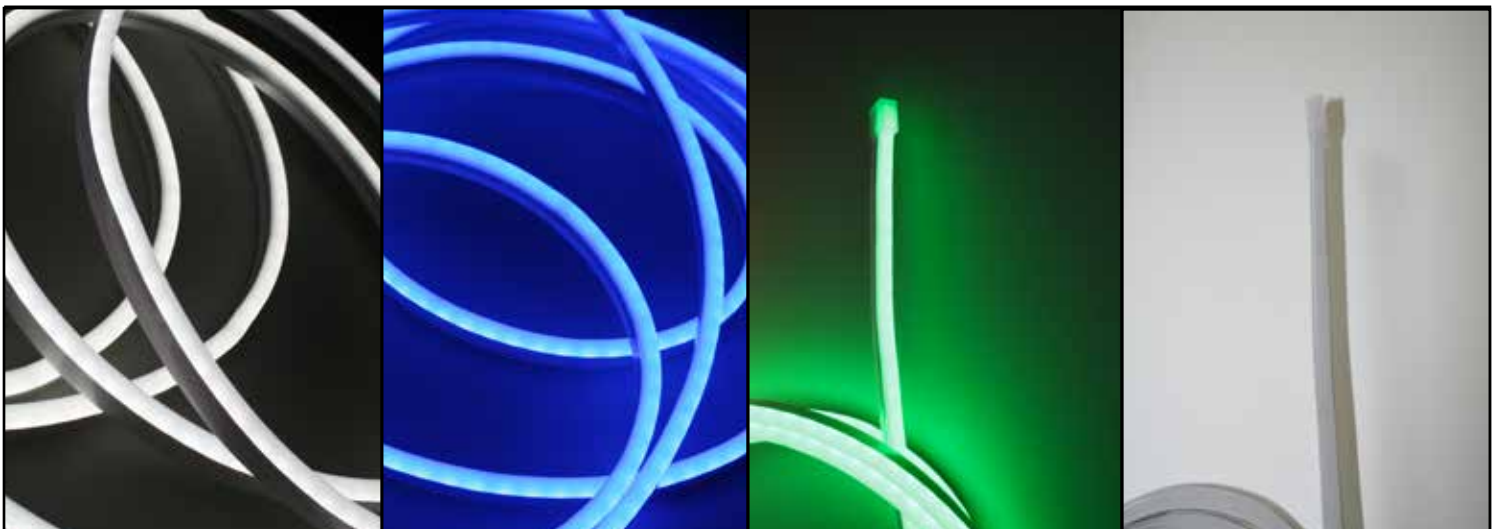

HP LED Flex Tape Digital

12V Starfire™

Energy Efficient Green Light

Starfire is the most verible flex tape on the market. It can move at over 100 miles an hour in different directions and in hundreds of colors, patterns and functions.



IP20
rated

50,000
hour
LIFETIME

5
Year
Warranty

FEATURES AND BENEFITS

- Cuttable every 2 Inches (LEDs per cut 2)
- Wattage: Per Foot 4
- Voltage: 12V
- LED Type: 5050
- Size: 10mm
- Roll Length: 16.5 feet
- LEDs per foot: 18
- Non-Waterproof: IP20
- LED Lifetime: 50,000 Hours
- Warranty: 5 Years
- 3M Double Coated 9080 Tissue Tape

MODEL #	LIGHT COLOR	COLOR TEMP.
SF-5MW	White	6000
SF-5MB	Blue	420-430
SF-5MR	Red	540-550
SF-5MG	Green	480-490
SF-5M-RGB	RGB	410-420

MODEL #	ACCESSORY DESCRIPTIONS
SF-R3P-10	Quick Snap but connector light to light
SF-L3P-10	Quick Snap L connector light to light
SF-T3P-10	Quick Snap T connector light to light
SF-X-3P-10	Quick Snap X connector light to light
SF-A-3P-10	6 Inch Quick Snap light to light
SF-FC1QSL-10	2-6 Inch Quick Snap light and controller
SF-3P-AB-2M	6 Foot Adapter Extension from light to controller
SF-S10-CLIP	Bag of 100 Mounting Clips one side screw
SF-FCMC	Finger Controller Mini Controller
SF-RCC	Multifunction Remote Controller



SF-B3P-10



SF-L3P-10



SF-T3P-10



SF-X3P-10



SF-FCMC



SF-A-3P-10



SF-FC1QSL-10



SF-3P-AB-2M



SF-S10-CLIP




SF-RCC



Flexible Task LED Tape

STEADY BURN - 12V DC

Energy Efficient Green Light

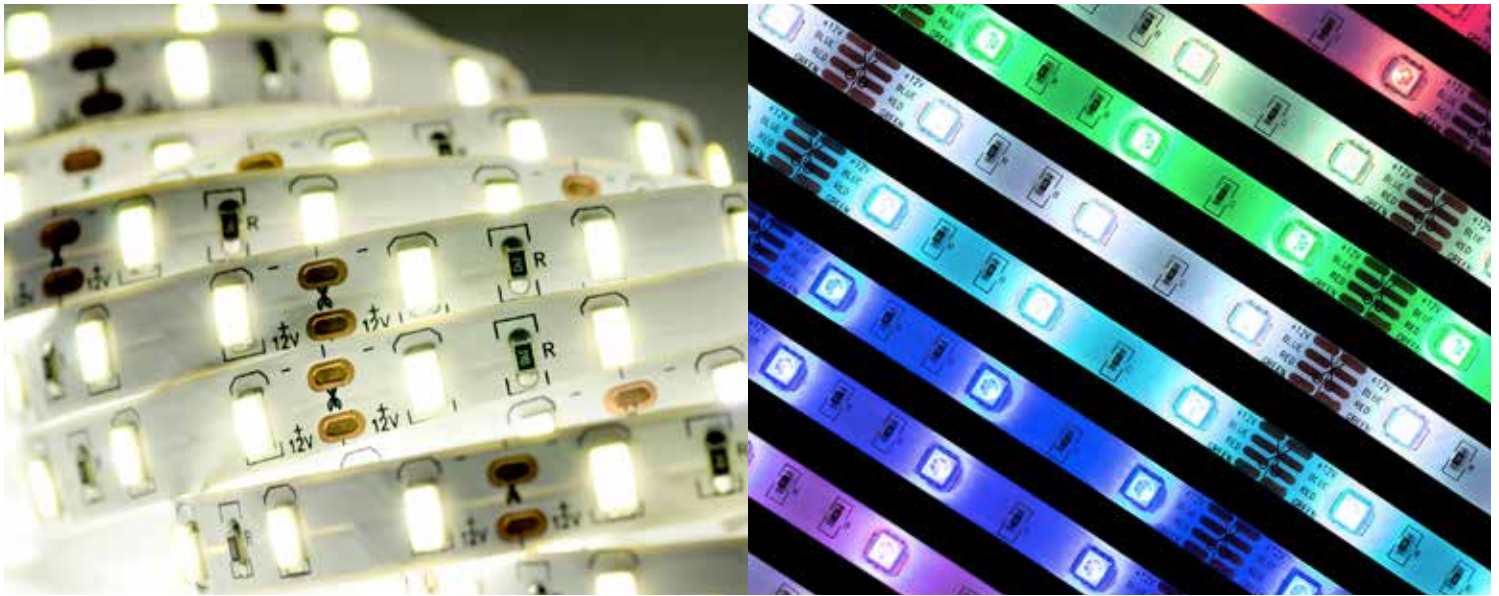

FEATURES AND BENEFITS

- Cuttable every 2 Inches
- Wattage: 4 per foot
- Voltage: 12V
- Maximum Run: 16.4 feet
- Size: 8mm
- Roll Length: 16.4 feet
- Waterproof: IP20
- LED Lifetime: 50,000 Hours
- Warranty: 5 Years

MODEL #	LIGHT COLOR	COLOR TEMP.
FT-12V-W	White	6000-6300K
FT-12V-WW	Warm White	3000-3100
FT-12V-R	Red	620-625
FT-12V-G	Green	517-520
FT-12V-B	Blue	460-464
FT-12V-Y	Yellow	588-590

MODEL #	ACCESSORY DESCRIPTIONS
FT-B2-8	Quick Snap but connector light to light
FT-L2-8	Quick Snap L connector light to light
FT-T2-8	Quick Snap T connector light to light
FT-X2-8	Quick Snap X connector light to light
FT-A2-8	6 Inch Quick Snap Power connector
FT-ET-8	6 Inch Quick Snap light to light connector
FT-S8-CLIP	Bag of 100 Mounting Clips one side screw



FT-B2-8



FT-L2-8



FT-T2-8



FT-X2-8



FT-A2-8



FT-ET-8



FT-S8-CLIP




Anodized Aluminum Channel & Diffuser Cover For LED Flex Tape Digital & Flexible Task LED Tape




C068

C068

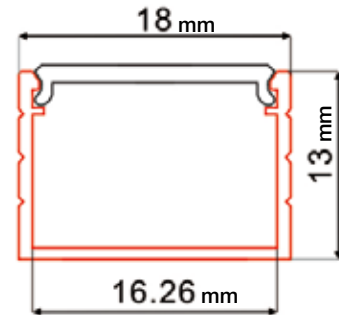


C101

C101

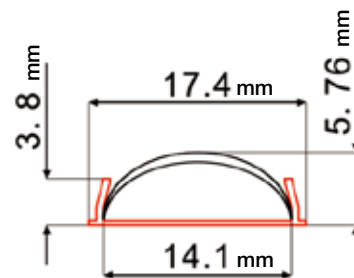

C002

C002

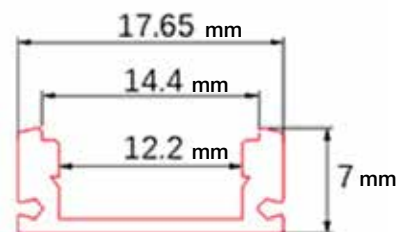


- All Channels are 39 Inches and come with mounting clips and end caps
- All Diagrams are in Millimeters




Anodized Aluminum Channel & Diffuser Cover For LED Flex Tape Digital & Flexible Task LED Tape

C003B

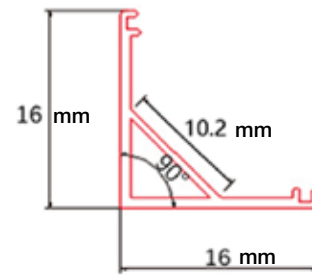


C003B

C003A

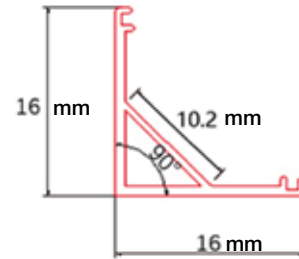


C003A

C006C

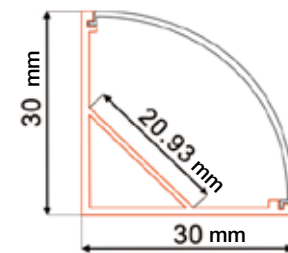


C006C

C048

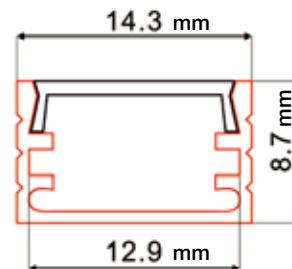

C048

C048

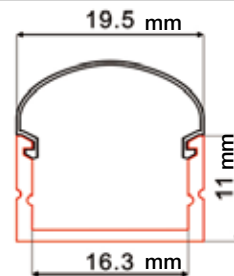

C048





LED POWER SUPPLY

*From time to time drivers are updated so items you receive may appear different.
We will bring that to your attention if it changes when you're ordering.*

12 Volt / 30 Watts or 24 Volt / 30 Watts

Output has 1 Lead



Dimensions 8" L x 1 1/2" W x 1 1/8" H

12 Volt / 100 Watts or 24 Volt / 100 Watts

Output has 2 Leads



Dimensions 9 1/2" L x 2 3/4" W x 1 3/4" H

12 Volt / 45 Watts or 24 Volt / 45 Watts

Output has 1 Lead



Dimensions 11" L x 1 1/2" W x 1 1/8" H

12 Volt / 150 Watts or 24 Volt / 150 Watts

Output has 4 Leads



Dimensions 9" L x 4 3/4" W x 2 1/2" H

12 Volt / 60 Watts or 24 Volt / 60 Watts

Output has 2 Leads



Dimensions 7" L x 2 3/4" W x 1 3/4" H

12 Volt / 200 Watts or 24 Volt / 200 Watts

Output has 4 Leads



Dimensions 9" L x 4 3/4" W x 2 1/2" H



**Extruded aluminum housing with cooling fins
Waterproof housing allows for Indoor/Outdoor use**



COMPANY

Toll Free: 800-468-8673

Email: phcrystalite@gmail.com

Website: www.flexalite.com